

# Delta & Delta max™ DT

## Roll-bag Converting

For high speed production of draw tape bags, bottom sealed and side sealed bags on roll.

- In-line or out-of-line
- With PE, bio or recycled film



} Delta & Delta max™ DT – Draw Tape bags }



Easy access to production data wherever you are



Draw Tape bags



**Headquarters**  
Roll-o-Matic A/S  
Damsbovej 12  
DK-5492 Vissenbjerg  
Denmark  
+45 6611 1618

**North America**  
Roll-o-Matic Inc.  
3001 Midpoint Drive  
Lancaster  
TX 75134 – USA  
+1 (435) 237 7408

**Latin America**  
Roll-o-Matic  
Varsovia 36, Oficina 1208  
Colonia Juárez, Cuauhtémoc  
06600 Ciudad de México  
+52 56 1111 9911 

# Delta & Delta max™ DT

## Roll-bag Converting

For production of draw tape bags on roll in 1 lane. The configuration includes a Delta sealing module and a Draw Tape module for insertion of the draw tape and sealing of the draw tape hem. You can choose to place the draw tape hem inside or outside the bag. With a special feature, it is also possible to switch between interior and exterior draw tape hem in the same line. The Draw Tape module can be equipped with automatic


splicing of the draw tape. The longitudinal seal of the draw tape hem is made by the fill-safe sealing system, which offers very high-quality sealing and significantly reduced energy consumption. With this sealing system, the well-known notch effect on low-grade HD materials can practically be eliminated and the risk of tearing the top of the bag when lifting the filled bag is greatly reduced. All bag types can be produced perforated or interleaved.

### Technical data for Delta & Delta max™ DT

	Delta 940 DT	Delta 1100 DT	Delta max™ 940 DT	Delta max™ 1100 DT
Min. film thickness	5 µm	5 µm	5 µm	5 µm
Max. speed*	160 m/min (530 ft/min)			
Max. cycles/min	300 bags	300 bags	490 bags	490 bags
Min. bag width	500 mm (19.7 in)	500 mm (19.7 in)	325 mm (12.8 in)	325 mm (12.8 in)
Max. bag width	10,000 mm (393.7 in)			
Max. bag length	940 mm (37 in)	1100 mm (43.3 in)	940 mm (37 in)	1100 mm (43.3 in)
Max. roll change/min	28 with tape 32 without tape			


\*) Depending on film quality and thickness

Additional equipment: print registration, all kinds of folding equipment (before and after sealing), cores, hot-melt, twist-tie, PP-string, paper tape.

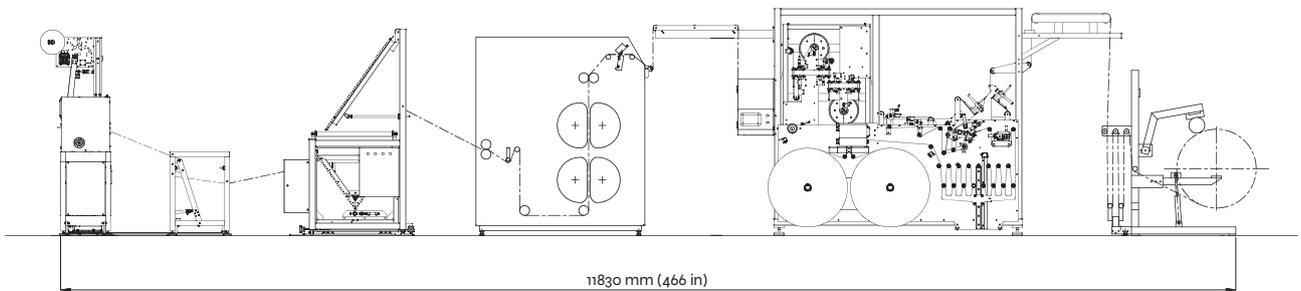

### Delta max™ DT Duplex out-of-line

#### Types of bags



Draw Tape




Draw Tape interleaved


#### You can also produce




Bottom sealed



Gusseted



Star sealed




Side sealed




Bottom sealed interleaved



Gusseted interleaved



Star sealed interleaved



Side sealed interleaved

Watch video of  
Delta DT



Delta DT  
Interleaved

