

Delta T Plus

Roll-bag Converting

Ultra-high capacity production of T-shirt bags on roll. Up to 700 bags per minute.

→ 1 or 2 lanes

→ With PE, bio or recycled film



} Delta T Plus - T-shirt bags }

T-shirt bags



Delta T Plus

Roll-bag Converting

The Delta 900 T Plus was designed for customers that need an even higher production capacity than that of a standard Delta 900 T – the capacity increase is higher than 16%.


With the Delta 900 T Plus it is possible to produce up to 700 bags per minute, with total sealing thickness up to 90 µm.

You can run with reduced speed with a total thickness up to 400 µm.

You can produce in-line with an extruder or out-of-line, from an unwinder, and the bags can be produced perforated or interleaved.


Technical data for Delta T Plus

Min. film thickness	5 µm
Max. speed	160 m/min (530 ft/min)
Max. cycles/min/lane	350 (700 bags)
Max. total sealing thickness	400 µm
Min. bag length	350 mm (13.8 in)
Max. sealing width	1 x 900 mm (35.4 in) or 2 x 440 mm (17.3 in)

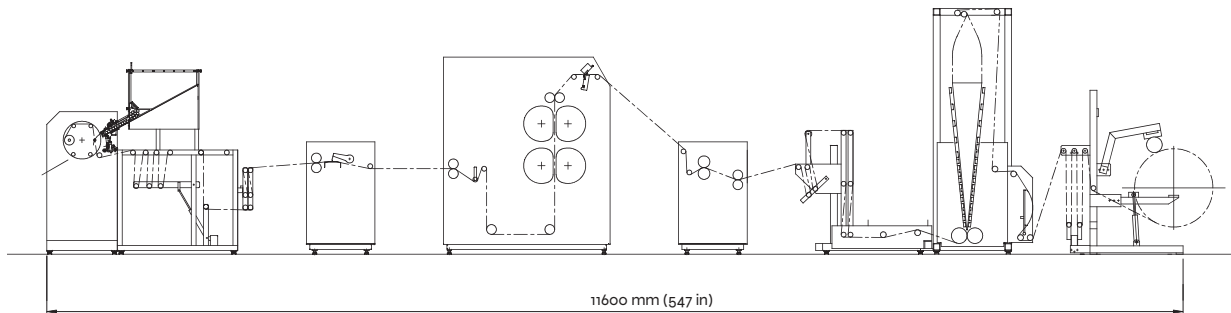

Delta T Plus

Types of bags




T-shirt




T-shirt interleaved


You can also produce




Wave-top




Bottom sealed



Gusseted



Star sealed



Side sealed



Wave-top interleaved



Bottom sealed interleaved



Gusseted interleaved



Star sealed interleaved



Side sealed interleaved

Watch video of Delta T

