

Delta & Delta max™ W

Roll-bag Converting

For high speed production of wave-top bags and other kinds of bags on roll.

- 1, 2 or more lanes
- in-line or out-of-line
- With PE, bio or recycled film



} Delta & Delta max™ W
Wave-top bags }



Easy access to production data wherever you are

Wave-top bags



Wave-top bags



Headquarters
Roll-o-Matic A/S
Damsbovej 12
DK-5492 Vissenbjerg
Denmark
+45 6611 1618

North America
Roll-o-Matic Inc.
3001 Midpoint Drive
Lancaster
TX 75134 - USA
+1 (435) 237 7408

Latin America
Roll-o-Matic
Varsovia 36, Oficina 1208
Colonia Juárez, Cuauhtémoc
06600 Ciudad de México
+52 56 1111 9911 

Delta & Delta max™ W

Roll-bag Converting

For production of wave-top bags on roll. The configuration includes a Delta sealing module and a punching module for forming the shape of the wave-top bag or similar cut-outs. The Delta W can be adapted for production of other kinds of bags with additional modules of the Delta program. This gives you great flexibility to adjust to the changing market demands. All bag types can be produced perforated or interleaved.

Key advantages include:


- **Fast setup:** Flexible dies mounted on a magnetic roller can be swapped in under a minute.
- **High precision:** Motorized die adjustment delivers accuracy within 1 micron (0.04 mil).
- **Heavy-duty capability:** Cuts film up to 8 x 75 microns (8 x 3 mil) thick.

Technical data for Delta & Delta max™ W

	Delta 900 W	Delta 1100 W	Delta 1250 W	Delta max™ 900 W	Delta max™ 1100 W	Delta max™ 1250 W
Min. film thickness	5 µm					
Max. speed*	180 m/min 600 ft/min	180 m/min 600 ft/min	180 m/min 600 ft/min	180 m/min 600 ft/min	160 m/min 530 ft/min	160 m/min 530 ft/min
Max. cycles/min/lane	600 (1200 bags)	510 (1020 bags)	510 (1020 bags)	550 (1100 bags)	400 (800 bags)	400 (800 bags)
Min. bag length	205 mm 8 in	250 mm 9.8 in	250 mm 9.8 in	300 mm 11.8 in	325 mm 12.8 in	325 mm 12.8 in
Max. sealing width 1 lane	900 mm 35.4 in	1100 mm 43.3 in	1250 mm 49.2 in	900 mm 35.4 in	1100 mm 43.3 in	1250 mm 49.2 in
Max. sealing width 2 lanes	2x 440 mm 2x 17.3 in	2x 540 mm 2x 21.2 in	2x 610 mm 2x 24 in	2x 440 mm 2x 17.3 in	2x 540 mm 2x 21.2 in	2x 610 mm 2x 24 in


*) Depending on film quality and thickness.

Additional equipment: print registration, all kinds of folding equipment (before and after sealing), cores, hot-melt, twist-tie, PP-string, paper tape.

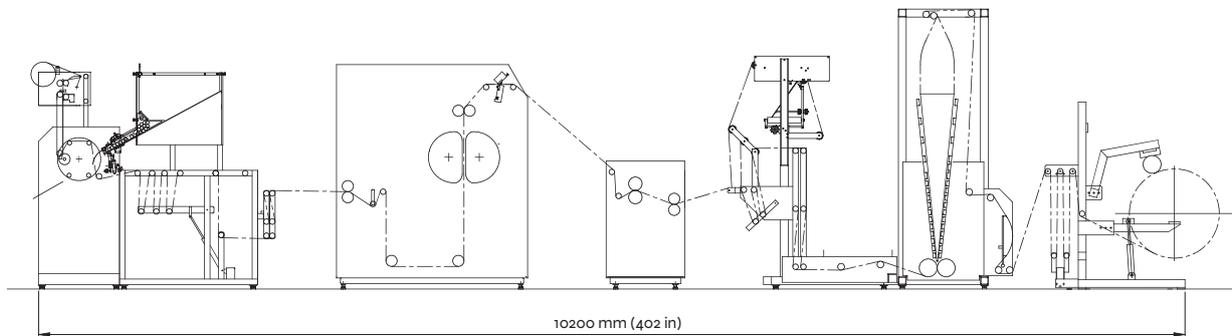

Delta max™ W Simplex

Types of bags



Wave-top



Wave-top interleaved


You can also produce



Bottom sealed




Bottom sealed interleaved



Gusseted




Gusseted interleaved



Star sealed



Star sealed interleaved



Side sealed



Side sealed interleaved

Watch video of Delta W

