

# Delta max™

## Roll-bag Converting

For high-speed production of garbage bags on roll.

- Speed up to 200 m/min
- 1 Metric ton of garbage bags per hour in 1 lane



Delta max™  
Garbage bags



**Headquarters**  
Roll-o-Matic A/S  
Damsbovej 12  
DK-5492 Vissenbjerg  
Denmark  
+45 6611 1618

**North America**  
Roll-o-Matic Inc.  
3001 Midpoint Drive  
Lancaster  
TX 75134 – USA  
+1 (435) 237 7408

**Latin America**  
Roll-o-Matic  
Varsovia 36, Oficina 1208  
Colonia Juárez, Cuauhtémoc  
06600 Ciudad de México  
+52 56 1111 9911

# Delta max™

## Roll-bag Converting

The Delta max™ is mainly target for production of large garbage bags on roll with heavy gauge film. Depending on film thickness and bag dimensions, it is possible to produce 1 metric ton of garbage bags per hour.

The typical configuration includes a double V-folding unit after sealing. Combined with Roll-o-Matic's HSW 550 winder, it is possible to make 28 roll changes per minute with paper tape or 32 roll changes per minute without tape.


### Technical data for Delta max™

Max. total sealing thickness	400 µm
Max. sealing width	900 mm (35.4 in)
Min. bag length*	650 mm (25.6 in)
Max. speed**	200 m/min (650 ft/min)
Max. cycles	250 bags/min
Max. roll changes	28/min with tape - 32/min without tape

\*) It is possible to produce shorter bags with reduced speed. Contact us for more information.


\*\*) Depending on film quality and thickness.

Additional equipment: print registration, folding equipment, PP-string, paper tape.

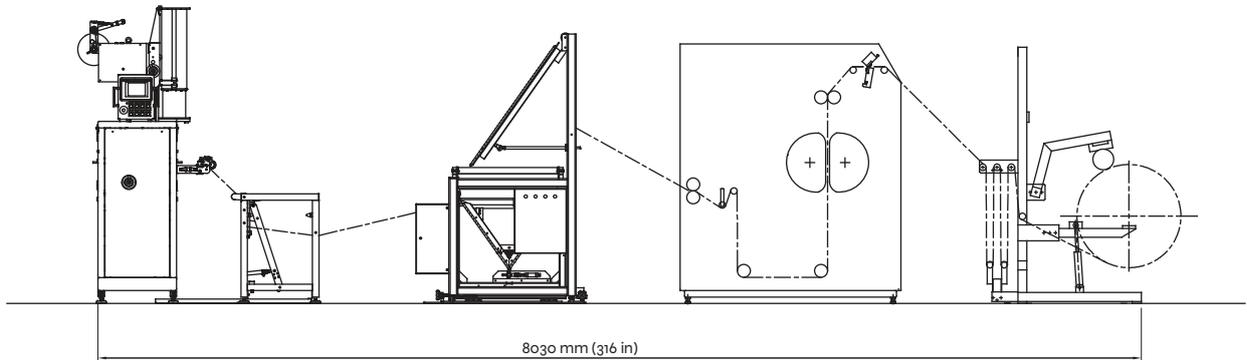


Delta max

### Types of bags



Bottom sealed



Garbage sacks folded

Watch video of  
Delta max

