

Delta T Plus

Roll-bag Converting

Ultra-high capacity production of T-shirt bags on roll. Up to 700 bags per minute.

→ 1 or 2 lanes

→ With PE, bio or recycled film



T-shirt bags



Delta T Plus


Roll-bag Converting

The Delta 900 T Plus was designed for customers that need an even higher production capacity than that of a standard Delta 900 T – the capacity increase is higher than 16%. With the Delta 900 T Plus it is possible to produce up to 700 bags per minute, with total sealing thickness up to 90 µ.

You can run with reduced speed with a total thickness up to 400 µ. You can produce in-line with an extruder or out-of-line, from an unwinder, and the bags can be produced perforated or interleaved.


Technical data for Delta T Plus

Min. film thickness	5 µm
Max. speed	160 m/min (530 ft/min)
Max. cycles/min	350 (700 bags)
Max. total sealing thickness	400 µm
Max. bag length	350 mm (13.8 in)
Max. sealing width	1 x 900 mm (35.4 in) or 2 x 440 mm (17.3 in)

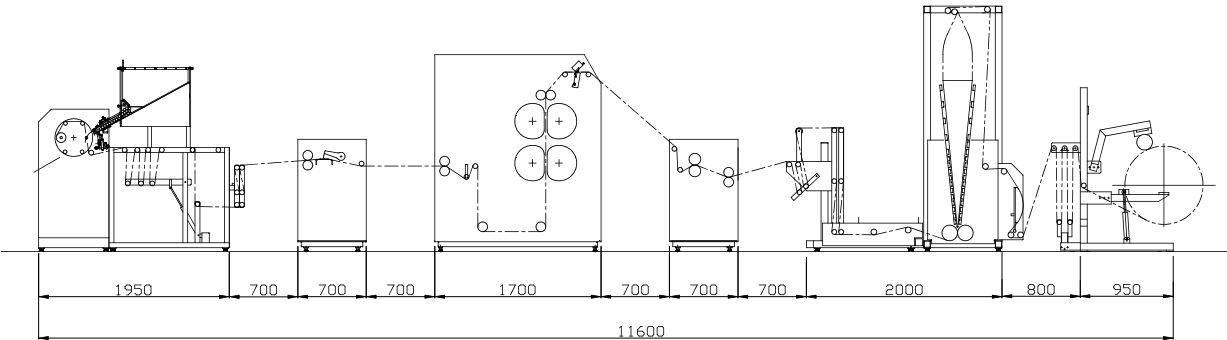

Delta T Plus

Types of bags




T-shirt




T-shirt
interleaved


You can also produce




Wave-top




Bottom sealed



Gusseted




Star sealed



Side sealed



Wave-top
interleaved



Bottom sealed
interleaved



Gusseted
interleaved



Star sealed
interleaved



Side sealed
interleaved

Watch video of
Delta T

