

Delta max™

Roll-bag Converting

For high-speed production of
garbage bags on roll.

→ Speed up to 200 m/min

→ 1 Metric ton of garbage
bags per hour in 1 lane



} Delta max™ – Garbage bags }



Delta max™

Roll-bag Converting

The Delta max™ is mainly target for production of large garbage bags on roll with heavy gauge film. Depending on film thickness and bag dimensions, it is possible to produce 1 metric ton of garbage bags per hour.

The typical configuration includes a double V-folding unit after sealing. Combined with Roll-o-Matic's HSW 550 winder, it is possible to make 28 roll changes per minute with paper tape or 32 roll changes per minute without tape.


Technical data for Delta max™

Max. total sealing thickness	400 µm
Max. sealing width	900 mm (35.4 in)
Min. bag length*	650 mm (25.6 in)
Max. speed**	200 m/min (650 ft/min)
Max. cycles	250 bags/min
Max. roll changes	28/min with tape - 32/min without tape

*) It is possible to produce shorter bags with reduced speed. Contact us for more information.


**) Depending on film quality and thickness.

Additional equipment: print registration, folding equipment, PP-string, paper tape.

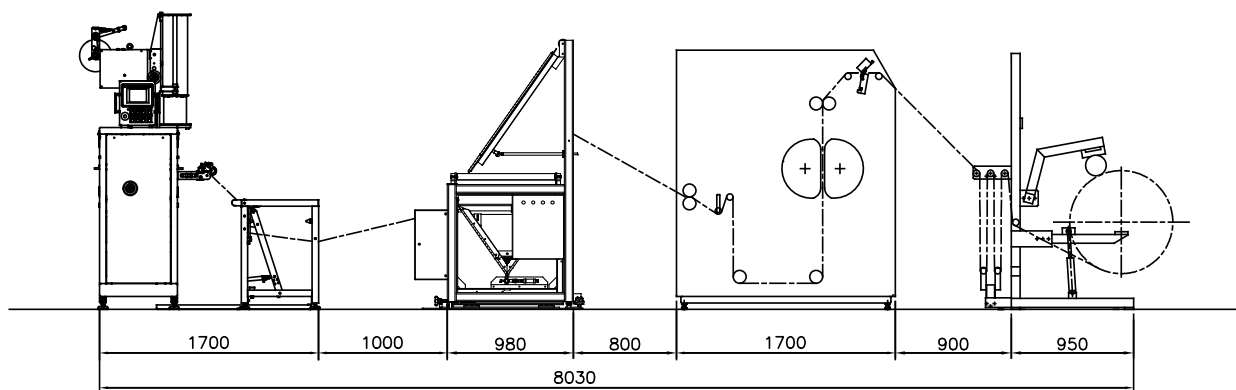


Delta max

Types of bags



Bottom sealed



Garbage sacks
folded

Watch video of
Delta max

