Delta & Delta max[™] ST Roll-bag Converting

For high speed production of star-sealed or conventional T-shirt bags on roll.

- → 1 or 2 lanes
- → In-line or out-of-line
- → With PE, bio or recycled film







Headquarters Roll-o-Matic A/S Damsbovej 12 DK-5492 Vissenbjerg Denmark +45 6611 1618 **North America** Roll-o-Matic Inc. 3001 Midpoint Drive Lancaster TX 75134 – USA +1 (435) 237 7408 Latin America Roll-o-Matic Varsovia 36, Oficina 1208 Colonia Juárez, Cuauhtémoc o6600 Ciudad de México +52 56 1111 9911

Delta & Delta max[™] ST Roll-bag Converting


For production of star-sealed T-shirt bags on roll in 1 or 2 lanes. The configuration is identical to the Delta T, for production of conventional T-shirt bags, with addition of the "star-sealed kit", a patented concept that allows production of star-sealed and conventional T-shirt bags in the same line. A patented concept makes it possible for the shaped cut-out to be done before perforation and sealing. This ensures that cutting is done in a zone with precise tension control, giving a clean cut and accurate positioning of the cut-out, minimizing skirt variation. All bag types can be produced perforated or interleaved. The configuration includes a Delta sealing module, a punching module for cutting out the handles of the T-shirt bag and an extraction module for removal of the cut-out waste. The flexible dies in the punching module are fixed to a magnetic roller and can be changed to another cutting pattern within a few seconds.

	Delta 900 ST	Delta 1100 ST	Delta max™ 900 ST	Delta max™ 1100 ST
Min. film thickness	5 µm	5 μm	5 µm	5 μm
Max. speed*	160 m/min (530 ft/min)			
Max. cycles/min	300 (600 bags)	300 (600 bags)	275 (550 bags)	275 (550 bags)
Min. bag length duplex	500 mm (19.6 in)	500 mm (19.6 in)	650 mm (25.5 in)	650 mm (25.5 in)
Max. bag length	10,000 mm (393.7 in)			
Max. sealing width 1 lane	900 mm (35.4 in)	1100 mm (43.3 in)	900 mm (35.4 in)	1100 mm (43.3 in)
Max. sealing width 2 lanes	2 x 440 mm (17.3 in)	2 x 540 mm (21.2 in)	2 x 440 mm (17.3 in)	2 x 540 mm (21.2 in)


Technical data for Delta & Delta max[™] ST

*) Depending on film quality and thickness

Additional equipment: print registration, all kinds of folding equipment (before and after sealing), cores, hot-melt, twist-tie, PP-string, paper tape.

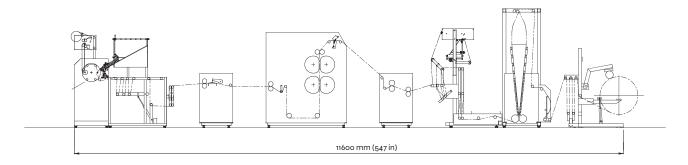

Delta ST Duplex

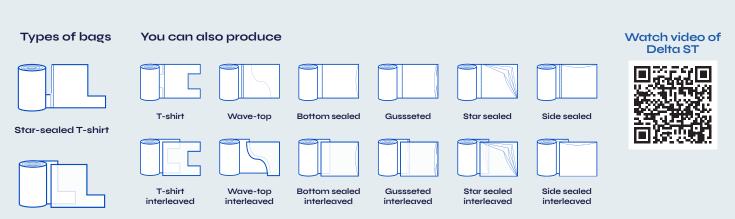

Star-sealed T-shirt interleaved